



IR33 Universal Electronic Controllers

The IR33 universal electronic controllers replace the IR32 range, offering additional features such as auto-tuning PID control and real time clock for managing working cycles and logging alarms. Temperature only versions are available with NTC, PTC or PT1000 inputs, whilst the universal versions can also accept PT100, J and K type thermocouples, DC Voltage and DC mA inputs.

The controllers feature a simple user interface, two independent control loops and are housed in a compact panel mounting enclosure. All versions can be connected to a network for monitoring and programming, using the optional RS-485 serial interface. The IR33 controllers are powered from 12 to 24Vac/dc or 115-230Vac and optional transformers are available for powering the low voltage controllers from 110Vac or 230Vac.

Models Available


- IR33V** 1 Relay Output
- IR33W** 2 Relay Outputs
- IR33Z** 4 Relay Outputs
- IR33A** 4 SSR Outputs
- IR33B** 1 Relay & 1 Analogue Output
- IR33E** 2 Relays & 2 Analogue Outputs

Product Features

- Temperature input or universal input
- Relay, SSR or analogue output versions
- 2 independent control loops
- Auto-tuning PID control
- Real time clock
- Infrared receiver and buzzer
- 12-24Vac/dc, 24Vac/dc or 115-230Vac
- Plug-in terminals

For digital temperature or process monitoring and control

Dimensions

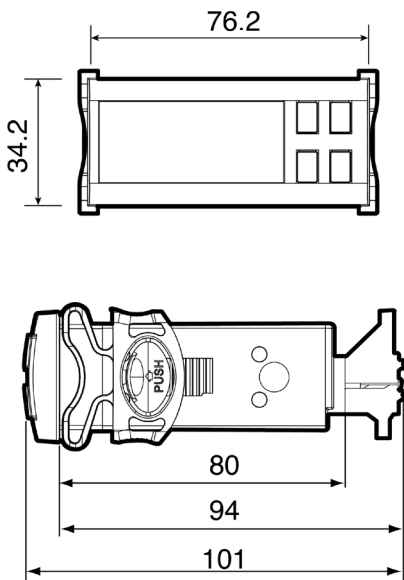


Panel cutout 71 mm x 29mm (-0.0/+0.5)

Allow 95mm x 40mm clearance around controller for panel clip

All dimensions in mm


Connections

IR33V7 / IR33W7 / IR33Z7




IR33V7 - OUTPUT 1 ONLY
 IR33W7 - OUTPUTS 1 AND 2
 IR33Z7 - OUTPUTS 1, 2, 3 AND 4

IR33A7




IR33B7 / IR33E7




IR33B7 - OUTPUTS 1 AND 2
 IR33E7 - OUTPUTS 1, 2, 3 AND 4

IR33V9 / IR33W9 / IR33Z9

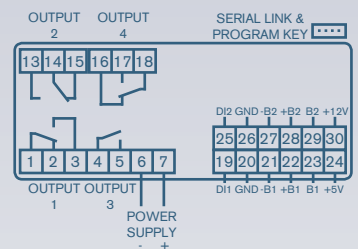


IR33V9 - OUTPUT 1 ONLY
 IR33W9 - OUTPUTS 1 AND 2
 IR33Z9 - OUTPUTS 1, 2, 3 AND 4

IR33A9

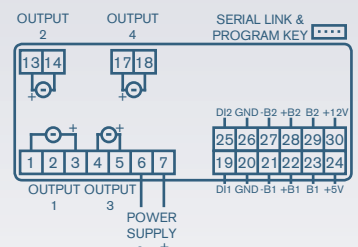

IR33B9 / IR33E9

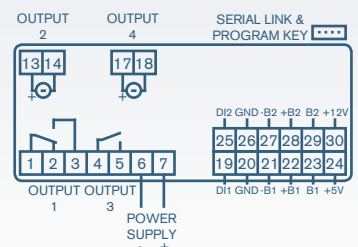

IR33B9 - OUTPUTS 1 AND 2
 IR33E9 - OUTPUTS 1, 2, 3 AND 4

Ordering information

| Model | Code | Description |
|-------|-------|-----------------------------------------------|
| | IR33V | 1 Relay Output Digital Controller |
| | IR33W | 2 Relay Output Digital Controller |
| | IR33Z | 4 Relay Output Digital Controller |
| | IR33A | 4 SSR Output Digital Controller |
| | IR33B | 1 Relay & 0-10Vdc Output Digital Controller |
| | IR33E | 2 Relay & 2 0-10Vdc Output Digital Controller |

| Input | Code | Description |
|-------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | 7 | NTC (-50 to 90°C) NTC-HT (-40 to 150°C) PTC (-50 to 150°C) PT1000 (-50 to 150°C) |
| | 9 | All above inputs and in addition:- PT1000 (-199 to 800°C) PT100 (-199 to 800°C) J/K Type Thermocouples DC Voltage 0-1V, -0.5 to +1.3V, 0-10V, 0-5V ratiometric DC Current 0-20mA, 4-20mA |

| Auxiliary Power | Code | Description |
|-----------------|------|--------------------------------------------------|
| | LR20 | 12 to 24Vac, 12 to 30Vdc (N/A for Input 9 above) |
| | MR20 | 24Vac/dc (N/A for Input 7 above) |
| | HR20 | 115-230Vac |
| | HB20 | 115-230Vac (with RTC function) |

| Options | Code | Description |
|---------|------------|----------------------------------------|
| | TRA12UNI11 | 110/12Vac Transformer |
| | TRA12UNI00 | 240/12Vac Transformer |
| | TRA2400001 | 240/24Vac Transformer |
| | IRTRUES000 | Remote control for IR33 universal |
| | IROPZKEY00 | Programming key with battery |
| | IROPZKEYA0 | Programming key with 230V power supply |
| | IROPZ485S0 | RS485 serial communication interface |

Example **IR33V7LR20**

Options**Temperature Probes**

A range of NTC, PTC, PT100 and thermocouple temperature probes are available to suit the IR33 controllers.

Remote Control

The infrared remote control allows access to all the main functions and configuration parameters for easy set up of all IR33 controllers from a distance.

Programming Key

All IR33 controllers can be programmed quickly using the optional programming key, even when not powered, reducing the risk of errors.

Tempatron: Eltime House, Hall Road, Maldon, Essex, CM9 4NF UK.

TEMPATRON

Tempatron Industrial Controls is a division of Eltime Ltd.

© Eltime Ltd. Tempatron IR33 Controllers 09/2014

Specification**Accuracy:**

- ±0.5% of scale range

Power Supply Voltage:

- LR: 12 to 24Vac (±10%), 12 to 30Vdc
- 110Vac with TRA12UNI11 transformer
- 230Vac with TRA12UNI00 transformer
- MR: 24Vac/dc
- 230Vac with TRA2400001 transformer
- HR: 115-230Vac (-15% to +10%)

Frequency:

- 50/60Hz

Burden:

- LR or MR: <4VA
- HR: <6VA

Inputs:

- NTC / PTC / PT1000
- PT100, J/K, V, mA (universal model only)

Digital Inputs:

- 2 voltage free contacts
- Contact resistance <10ohms
- Closing current 6mA

Relay Output:

- 1, 2 or 4 pole relay contacts
- 8A at 250Vac (resistive)
- 4A at 250Vac (inductive, $\cos\phi = 0.6$)
- 100,000 operations

SSR Output:

- Maximum output 12V/20mA
- Maximum output resistance 600 ohms

Analogue Output (0-10Vdc):

- Typical ramp time (10-90%) < 1sec
- Maximum output ripple 100mV
- Maximum output current 5mA
- Maximum length of cables 10m

Operating Temperature & Humidity:

- -10°C to 50°C
- <90% rH (non-condensing)

Enclosure Code:

- Case IP65

Weight:

- IR33V/IR33A/IR33B: 200g
- IR33W/IR33E: 220g
- IR33Z: 240g

Markings:

- CE marked (meets EN61010-1 low voltage and EN50081-1/50082-1 EMC directives)

Specification subject to change without notice.